
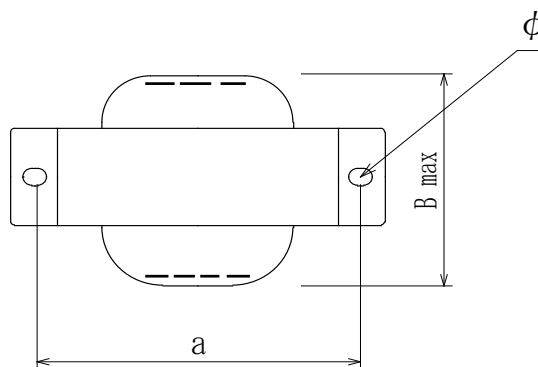


# BRシリーズ

入力100V系、出力30V以下・200V系、出力24V以下  
ラグ端子(ハンダ付け端子)タイプ

単相・複巻・50/60Hz・耐電圧AC1.5 kV(一部、2次-鉄心間0.5kV)・適用規格JIS C-6436  
A種絶縁(温度上昇60℃以下)  
RoHS指令対象10物質非含有

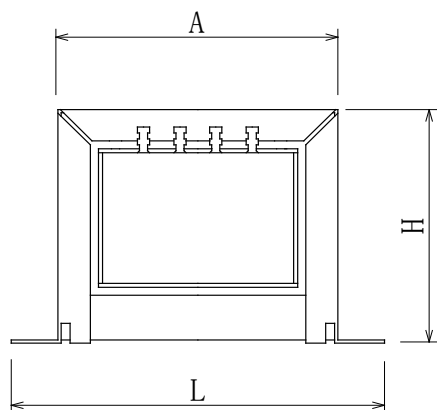

品名	仕様(V)			外形寸法(mm)				取付寸法(mm)		質量(kg)	生産中止該当品名
	1次電圧(V)	2次電圧(V)	2次電流(A)	A±2	B	H±2	L±2	a±1	φ		
BR1-1603	100/110	8/12/16	0.3	50	47	43	69	60	4.2 x 5.7	0.27	HT-1603
BR1-1605			0.5	50	51	43	69	60	4.2 x 6.2	0.33	HT-1605
BR1-161			1	62	59	54	85	74	4.2 x 6.2	0.53	HT-121 / HT-161
BR1-162			2	69	74	59	92	81	4.5 x 6.5	1.08	HT-122 / HT-162
BR1-163			3	79	73	68	104	93	4.5 x 6.5	1.63	HT-123 / HT-163
BR1-165			5	79	80	69	105	93	4.5 x 6.5	1.71	HT-125 / HT-165
BR1-2403	100/110	12/20/24	0.3	50	51	43	69	60	4.2 x 6.2	0.33	HT-2003
BR1-2405			0.5	56	55	49	80	69	4.5 x 6.5	0.44	HT-2005 / HT-2405
BR1-241			1	69	70	59	92	81	4.5 x 6.5	0.92	HT-201 / HT-241
BR1-242			2	79	73	69	105	93	4.5 x 6.5	1.63	HT-202 / HT-242
BR1-243			3	79	80	69	105	93	4.5 x 6.5	1.71	HT-203 / HT-243
BR1-3002	100/110	20/25/30	0.2	50	47	43	69	60	4.2 x 5.7	0.27	HT-3002
BR1-3005			0.5	62	59	54	85	74	4.2 x 6.2	0.53	HT-3005
BR1-301			1	69	70	59	92	81	4.5 x 6.5	0.92	HT-301
BR1-302			2	79	73	69	105	93	4.5 x 6.5	1.63	HT-302
BR1-303			3	79	80	69	105	93	4.5 x 6.5	1.71	HT-303

BR2-1205	200/220	8/10/12	0.5	50	47	43	69	60	4.2 x 5.7	0.27	2H-1205
BR2-121			1	56	55	49	80	69	4.5 x 6.5	0.44	2H-121
BR2-122			2	69	70	59	92	81	4.5 x 6.5	0.92	2H-122
BR2-123			3	69	80	59	92	81	4.5 x 6.5	1.25	2H-123
BR2-2405	200/220	12/20/24	0.5	56	55	49	80	69	4.5 x 6.5	0.44	2H-2005 / 2H-2405
BR2-241			1	69	70	59	92	81	4.5 x 6.5	0.92	2H-201 / 2H-241
BR2-242			2	79	73	69	105	93	4.5 x 6.5	1.63	2H-202 / 2H-242
BR2-243			3	79	80	69	105	93	4.5 x 6.5	1.71	2H-203 / 2H-243

\*BRシリーズと生産中止品は、仕様内容、外寸、取付が若干異なりますのでご注意ください。